


PLAN VIEW

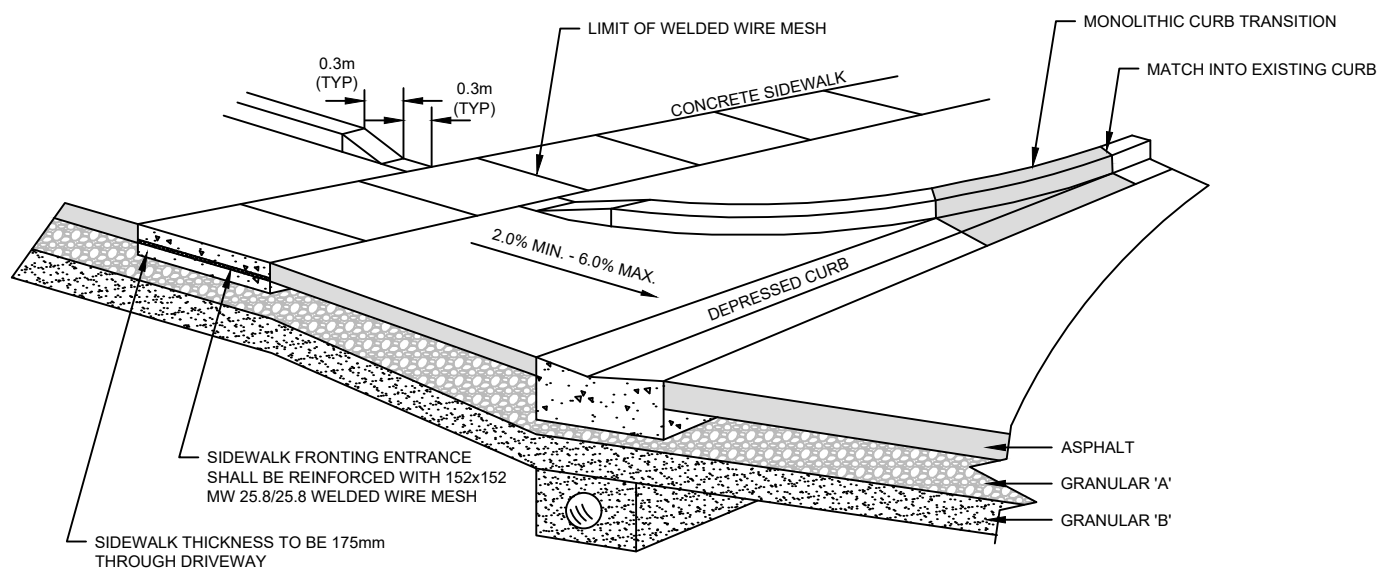

PROFILE VIEW

MINIMUM ENTRANCE DESIGN PARAMETERS		
	COMMERCIAL / INSTITUTIONAL	INDUSTRIAL
SURFACE COURSE ASPHALT (HL3)	40mm	40mm
BASE COURSE ASPHALT (HL8)	50mm	80mm
GRANULAR 'A'	150mm	150mm
GRANULAR 'B'	300mm	375mm
ENTRANCE WIDTH (MIN.)	6.0m	6.0m
ENTRANCE RADIUS (MIN.)	6.0m	9.0m

NOTES

1. ALL ENTRANCES MUST BE ALIGNED PERPENDICULAR TO THE ROAD, SKEWED ENTRANCES ARE NOT PERMITTED.
2. ENTRANCES SHALL NOT BE LOCATED CLOSER THAN 7.5m FROM THE NEAR STREET LINE AT INTERSECTIONS.
3. FOR SIDEWALK CONSTRUCTION DETAILS, REFER TO C-307

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED



COMMERCIAL / INSTITUTIONAL & INDUSTRIAL ENTRANCE DETAILS

REVISION NO.: 1
REVISION DATE: DECEMBER 2025

C-314